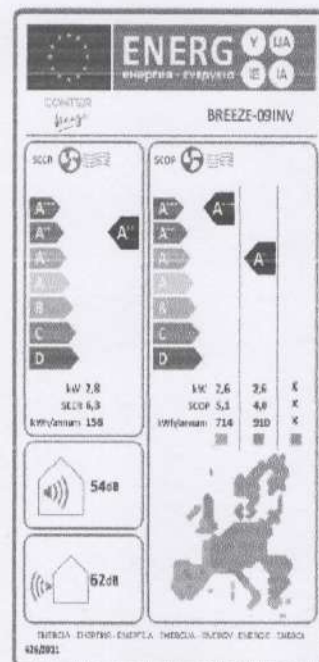


AER CONDITIONAT INVERTER CONTER BREEZE









Specificatii tehnice **9000 BTU**

Model		CONTER BREEZE 09 INV	
Denumire model Midea		MSAFBU-09HRDN8-QRD0GW(N)	
Unitate Interioara		MSAFBU-09HRDN8-QRD0GW	
Unitate Exterioara		MOX133-09HFN8-QRD0GW	
Alimentare		Ph-V-Hz	220-240V,1Ph,50Hz
Racire nominala	Capacitate	Btu/h	9000 (3100~11600)
Putere racire intrare		W	732 (100~1240)
Curent racire		A	3.18 (0.4~5.4)
Incalzire nominala	Capacitate	Btu/h	10000 (2800~11500)
Putere incalzire intrare		W	733 (120~1200)
Curent incalzire		A	3.18 (0.5~5.2)
Racire sezoniera	Pdesignc	kW	2.8
	SEER	W/W	6.3
	Clasa eficienta energetica		A++
Incalzire(medie)	Pdesignh	kW	2.6
	SCOP	W/W	4.0
	Clasa eficienta energetica		A+
	Tbiv	°C	-7
Tol		°C	-15
Indepartare umiditate		L/h	1
Consum max. intrare		W	2150
Curent max.		A	10
Curent pornire		A	/
Compresor	Model	KSK103D33UEZ3(YJ)	
	Tip	Rotativ	
	Brand	GMCC	
	Capacitate	Btu/h	2035/3255
	Intrare	W	325/826
	Curent nominal (RLA)	A	2.4/5.65
	Amplificator rotor blocat (LRA)	A	/
	Protector termic		/
	Pozitie protector termic		/
	Condensator	uF	/
	Ulei Refrigerant/incarcare ulei	ml	ESTER OIL VG74/310



Motor ventilator unitate interioara	Model		YKFG-13-4-38L-4
	lesire	W	40
	Condensator	uF	1.2
	Viteza (Hi/Mi/Lo)	r/min	1030 / 900 / 750
Serpentina unitate interioara	a. Numar de randuri		2.0
	b. Pas tub(a)x pas rand(b)	mm	19.5x11.6
	c. Distanta aripioare	mm	1.2
	d. Tip aripioare (cod)		Aluminiu hidrofilic
	e. Diametru ext. tub si tip	mm	Φ5, canal interior tub
	f. Lungime x inaltime x latime serpentina	mm	595x78x23.2+595x117x23.2+595x78x23.2
	g. Numar circuite		4
Debit aer unitate interioara (Hi/Mi/Lo)	m3/h		466/360/325
Nivel zgomot unitate interioara (Hi/Mi/Lo/Si)	dB(A)		38.5/32/25
Nivel zgomot unitate interioara (Hi)	dB(A)		54.0
Unitate interioara	Dimensiuni(W*D*H)	mm	805x194x285
	Ambalare (W*D*H)	mm	870x270x365
	Masa neta/bruta	Kg	7.6/9.7
Motor ventilator unitate interioara	Model		ZKFN-34-10-1
	lesire	W	/
	Condensator	uF	0
	Viteza (Hi/Mi/Lo)	r/min	760/450
Serpentina unitate exterioara	a. Numar de randuri		1
	b. Pas tub(a)x pas rand(b)	mm	21x22
	c. Distanta aripioare	mm	1.3
	d. Tip aripioare (cod)		Aluminiu hidrofilic
	e. Diametru ext. tub si tip	mm	Φ7, canal interior tub
	f. Lungime x inaltime x latime serpentina	mm	740x462x22
	g. Numar circuite		2
Debit aer unitate exterioara	m3/h		1750
Nivel zgomot unitate exterioara	dB(A)		55.5
Nivel max. zgomot unitate exterioara	dB(A)		62.0
Unitate exterioara	Dimensiuni(W*D*H)	mm	720x270x495
	Ambalare (W*D*H)	mm	835x300x540
	Masa Neta/bruta	Kg	23.2/25.0
Refrigerant	tip		R32
	GWP		675
	Canlitare incarcare	Kg	0.55
Presiune proiectata	MPa		4.3/1.7
Conducte refrigerant	Lateral lichid/ lateral gaz	mm (inch)	6.35mm(1/4in)/9.52mm(3/8in)
	Lungime max. conducta refrigerant	m	25
	Diferenta max. de nivel	m	10
Conexiuni cablaj			1.5x5//
Tip stecher			//fara
Tip termostat			Comanda de la distanta
Temperatura lucru	Unitate interioara(racire/ incalzire)	℃	17~32/0~30
	Unitate exterioara(racire/ incalzire)	℃	-15~-50/-15~30
Domeniu aplicare	minim-maxim	m2	12~18

Caracteristici principale

-  Racire si incalzire
-  Control prin WIFI
-  Functie Follow me
-  Auto curatare
-  Auto restart
-  Mod noapte (Sleep mode)

CONTER

breeze

POWERED BY

Midea[®]